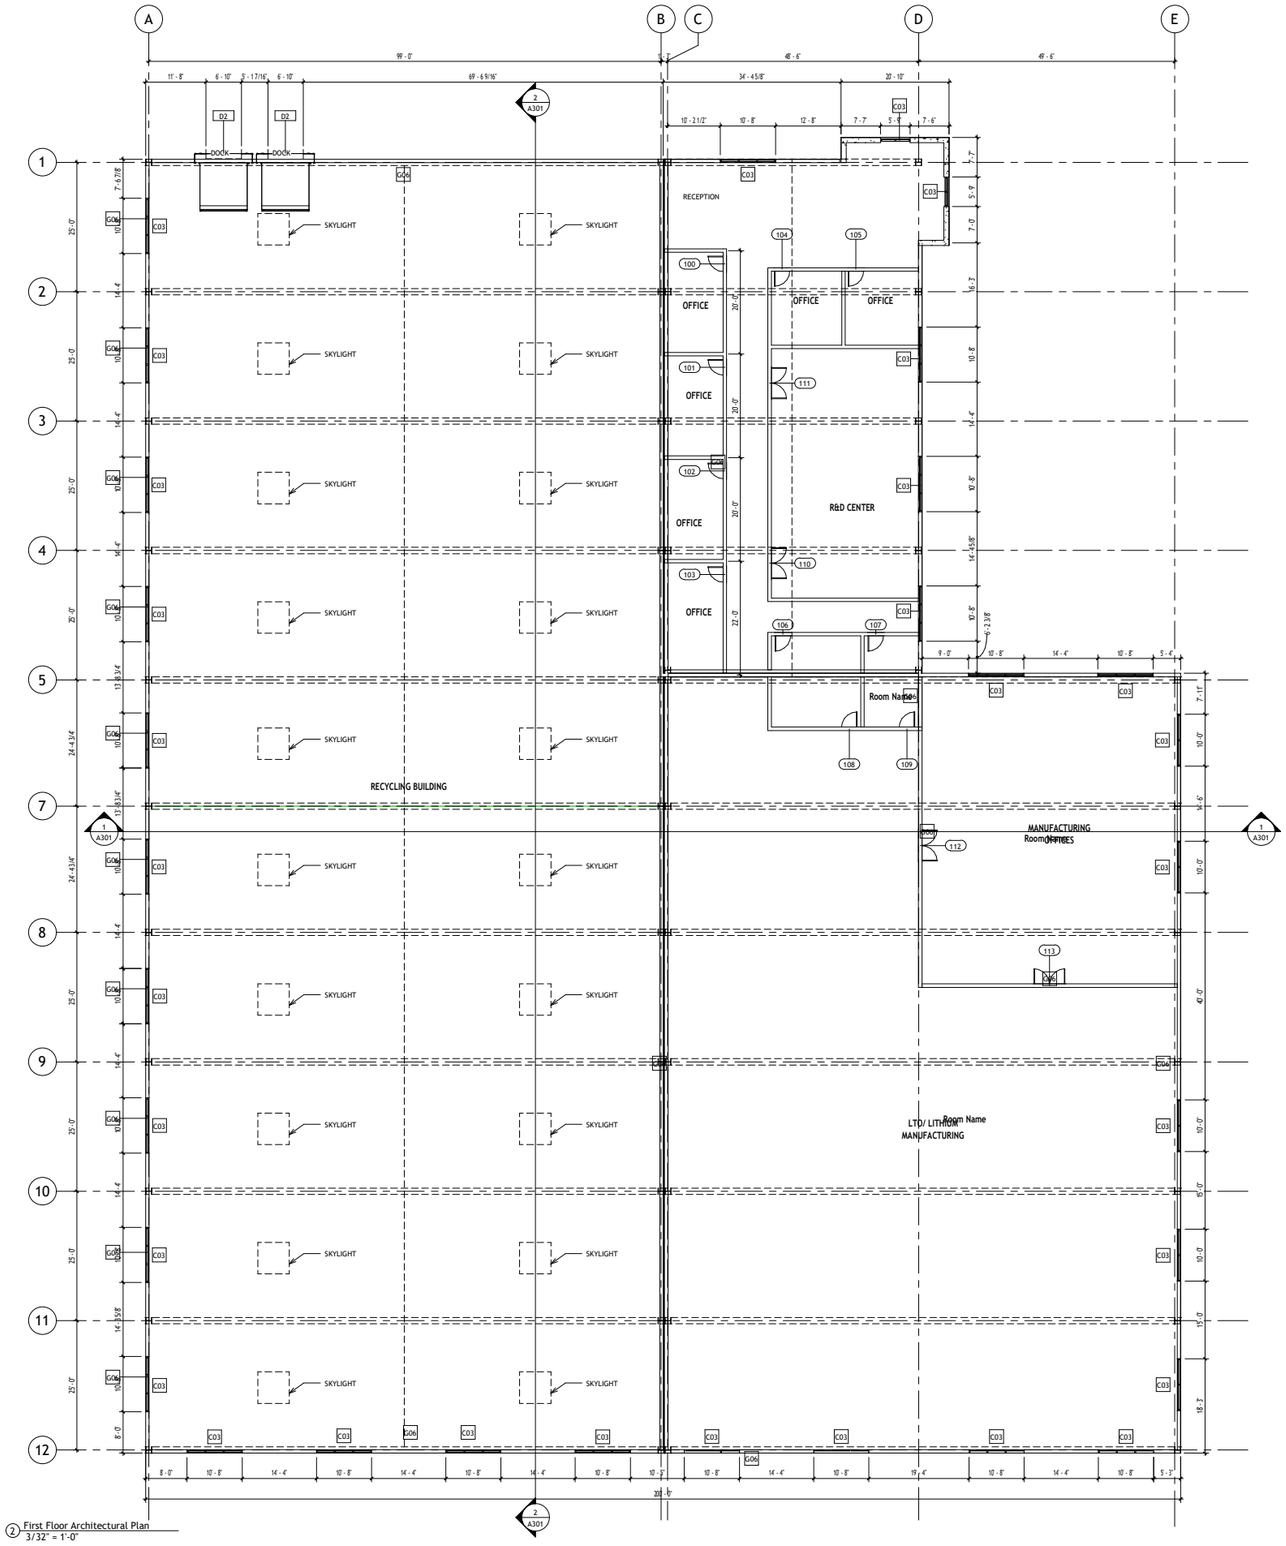

2 First Floor Architectural Plan
3/32" = 1'-0"

GENERAL NOTES

1. ALL DIMENSIONS ARE TO FACE-OF-STUD UNLESS NOTED OTHERWISE. ALL EXTERIOR COLUMNS ARE DIMENSIONED TO OUTSIDE FACE OF WALL. REFER TO DETAILS FOR CLARIFICATION.
2. SEE SHEET G002 FOR PROJECT GENERAL NOTES REVIEW ALL NOTES PRIOR TO CONSTRUCTION.
3. PRIOR TO CONSTRUCTION, CONTRACTOR TO VERIFY ALL COLORS AND MATERIALS.
4. INSTALL ALL MATERIALS PER MANUFACTURERS RECOMMENDATION.
5. ALL GYP. BOARD SURFACES TO BE TAPED, SANDED, AND PRIMED.
6. SEE STRUCTURAL DRAWINGS AND CALCULATIONS FOR ALL STRUCTURAL REQUIREMENTS.
7. COORDINATE WITH STRUCTURAL FRAMING PLANS FOR LOCATIONS OF COLUMNS, BEAMS, ETC.
8. COORDINATE ALL WINDOWS HEAD HEIGHTS AND SIZES WITH ELEVATIONS AND SCHEDULES.
9. COORDINATE WITH ELECTRICAL FOR ALL LIGHTING, POWER, & DATA REQUIREMENTS.
10. FIRE RATED ASSEMBLIES SHALL BE CONTINUOUS BOTH HORIZONTALLY AND VERTICALLY AND SHALL EXTEND FROM RATED ASSEMBLY TO RATED ASSEMBLY. FIRE CAULK ALL PENETRATIONS.
11. FIRE EXTINGUISHERS, SMOKE DETECTORS, OTHER EMERGENCY DEVICES LOCATIONS, AND RATINGS SHALL BE APPROVED BY FIRE MARSHAL PRIOR TO INSTALLATION.
12. FRAMING CONTRACTOR SHALL PROVIDE AIDDTIONAL BLOCKING THROUGHOUT THE PROJECT AS REQUIRED TO ACCOMMODATE WALL-MOUNTED FURNISHINGS, ARTWORK, ETC.
13. DOORS SHALL BE LOCATED 6" OFF ADJACENT WALL UNLESS NOTED OTHERWISE.
14. CONTRACTOR IS TO PROVIDE SUBMITTALS AND SHOP DRAWINGS ON ALL KEYNOTED ITEMS FOR APPROVAL FROM WNER/ARCHITECT.
15. PRIOR TO ORDERING ANY EXTERIOR FINISHES, THE CONTRACTOR IS TO VERIFY ALL COLORS AND TYPES OF MATERIALS WITH OWNER/ARCHITECT.
16. ALL ASPECTS OF THIS PROJCET SHALL COMPLY WITH THE AMERICANS WITH DISABILITIES ACT AND THE ASSOCIATED DETAILS SEE G004 -G007. IF CONFLICTS OCCUR WHICH MAKE COMPLIANCE WITH THE ADA IMPOSSIBLE, NOTIFY THE ARCHITECT IMMEDIATELY BEFORE CONTINUING THE WORK.
17. ALL WALLS SHALL EXTEND TO THE UNDERSIDE OF DECK U.N.O.
18. SEE INTERIOR DRAWINGS FOR ALL FLOOR FINISHES.
19. PROVIDE MARKING & IDENTIFICATION ABOVE CEILING ON ALL RATED PARTITIONS ACCORDING TO 2021. IBC 703.5.
20. REFER TO REFLECTED CEILING PLANS FOR BULKHEAD DIMENSIONS AND WALL TYPES.
21. REFER TO OPENING TYPE SHEETS FOR FRAME ELEVATIONS REFERNCED IN THIS & OTHER VIEWS.
22. APPLY THE DOOR FRAME PAINT ONLY TO THE DOOR FRAM COVERING BOTH SIDES.
23. WHERE FLOOR MATERIAL CHANGES OCCURS BETWEEN TWO ROOMS, TRANSITION AT CENTER OF DOOR SO MATERIAL CHANGE IS NOT VISIBLE WHEN DOOR IS IN THE CLOSED POSITION.
24. PROVIDE SOLID BLOCKING IN WALLS TO SUPPORT SHELVES, CABINETS, TV'S,OWNERS EQUIPMENT, ETC. CONTRACTOR TO COORDINATE WITH OWNER FOR ANY OWNER SUPPLIED ITEMS THAT REQUIRES BLOCKING IN THE WALLS OR CEILINGS, OR ANY OTHER SPECIAL REQUIREMENTS.
27. DO NOT SCALE THE DRAWINGS.
28. CEILING HEIGHT MEASURED FROM CONCRETE-SEE-SECTIONS.
29. COORDINATE WITH OWNER ON ALL OWNER PROVIDED ITEMS.
30. COORDINATE WITH MECHANICAL DRAWINGS FOR ALL PLUMBING FIXTURES.

Project Name

Client Name

UPPER WINDOW PLAN

Project Number	
Issue Date	
Author	
Checker	
A201	
As indicated	