ARCHITECT & STRUCTURAL ENGINEER

ae urbia
ARCHITECTS & ENGINEERS
909 W SOUTH JORDAN PKWY SOUTH JORDAN-UT 84095
www.aeurbia.com 801.746.0456

GENERAL CONTRACTOR

MECHANICAL ENGINEER

DESIGN BUILD GROUP
4704 CRESTMOOR CT.
WEST JORDAN, UTAH 84088
OFFICE 801.330.1472
FAX 801.999.4341

ELECTRICAL ENGINEER

AMP Engineering
ELECTRICAL ENGINEERS
AMP Electrical Engineering, LLC
1699 Spring Creek Drive
Lehi, Utah
(801) 420-2153
ANDY POWELL
1699 S. SPRING CREEK DRIVE
LEHI, UT 84043
801-420-2153

CIVIL ENGINEER

CIR
CIVIL ENGINEERING • SURVEYING
10718 S. BECKSTEAD LANE, STE. 102
SOUTH JORDAN, UT 84095

LANDSCAPE ARCHITECT

PKJ DESIGN GROUP
Landscape Architecture ~ Planning & Visualization
3450 N. TRIUMPH BLVD SUITE 102
LEHI, UT 84043
OFFICE 801.960.2698

CONTRACTOR COORDINATION NOTES

1. IT IS THE CONTRACTOR'S RESPONSIBILITY TO REVIEW AND COORDINATE THE WORK OF ALL SUB CONTRACTORS, TRADES AND SUPPLIERS WITH THE REQUIREMENTS OF THE CONTRACT DOCUMENTS
BEFORE COMMENCING CONSTRUCTION, AND TO ASSURE THAT ALL PARTIES ARE AWARE OF ALL REQUIREMENTS, REGARDLESS OF WHERE THE REQUIREMENTS OCCUR IN THE CONTRACT DOCUMENTS, WHICH MIGHT AFFECT THE WORK OF THAT PARTY AND THAT THE MOST UP TO DATE DOCUMENTS ARE BEING REFERENCED.
2. AS PART OF THE CONTRACTORS RESPONSIBILITY TO COORDINATE THE WORKOF ALL SUB CONTRACTORS, TRADES AND SUPPLIERS, THE CONTRACTOR SHALL ENDEAVORTO IDENTIFY AND NOTIFY THE ARCHITECT OF ANY CONFLICTS BETWEEN THE WORK OF DIFFERENT PARTIES AT THE EARLIEST POSSIBLE DATE SO AS TO ALLOW REASONABLE AND ADEQUATE TIME FOR THE CONFLICT TO BE RESOLVED WITHOUT DELAYING THE WORK. ALL DEVIATIONS FROM THAT WHICH IS REQUIRED
BY THE CONTRACT DOCUMENTS MUST BE REVIEWED IN ADVANCE BY THE ARCHITECT.
3. THE CONTRACTOR SHALL NOTIFY THE OWNER REPRESENTATIVE OF ANY CONFLICTS BETWEEN VENDOR DRAWINGS AND THE CONSTRUCTION DOCUMENTS. LATEST VENDOR DRAWINGS SHALL BE VERIFIED WITH OWNER AND ARCHITECT.
4. IN THE CASE OF CONFLICTS IN THE CONTRACT DOCUMENTS THE MOST STRINGENT REQUIREMENT
GOVERNS

DEFERRED SUBMITTAL REQUIREMENTS

DEFERRED SUBMITTALS ARE THOSE PORTIONS OF DESIGN THAT ARE NOT SUBMITTED AT THE TIME OF THE
PERMIT APPLICATION AND HAVE RECEIVED PRIOR APPROVAL FROM THE BUILDING OFFICIAL TO BE DEFERRED. THE DEFERRED SUBMITTALS SHALL BE SUBMITTED TO THE ARCHITECT AND GENERAL CONTRACTOR WITHIN SIX WEEKS TO COMMENCEMENT OF CONSTRUCTION TO THIS PORTION OF WORK.
DEFERRED SUBMITTALS SHALL BE SUBMITTED TO THE ARCHITECT AND GENERAL CONTRACTOR WITHIN FOUR
WEEKS OF THE AWARD OF THE CONTRACT TO THE GENERAL CONTRACTOR. THIS PROCESS MAY VARY, BUT
SHOULD ALLOW FOR POSSIBLE 4-6 WEEK REVIEW PROCESS. CONTRACTOR IS RESPONSIBLE TO COORDINATE FOR REVIEW TIMES IN CRITICAL PATH OF CONSTRUCTION.

DEFERRED SUBMITTAL PROCESS

1. THE DEFERRED SUBMITTAL SHALL FIRST BE REVIEWED BY THE GENERAL CONTRACTOR FOR COMPLIANCE WITH THE CONSTRUCTION DOCUMENTS. THE SUBMITTAL MUST BE REVIEWED, APPROVED, STAMPED AND SIGNED BY THE GENERAL CONTRACTOR BEFORE BEING SUBMITTED TO THE ARCHITECT.
2. THE GENERAL CONTRACTOR SHALL SUBMIT THE DEFERRED SUBMITTAL TO THE ARCHITECT.
3. THE DEFERRED SUBMITTAL ITEMS WILL BE REVIEWED BY THE ENGINEER OR ARCHITECT IN RESPONSIBLE CHARGE. THE ENGINEER OR ARCHITECT WILL ATTACH A LETTER TO THE SUBMITTAL STATING THAT THE DEFERRED ITEM IS IN CONFORMANCE WITH THE DESIGN OF THE STRUCTURE.
4. THE APPROVED SUBMITTALS WILL BE RETURNED TO THE GENERAL CONTRACTOR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CITY SUBMITTAL AND ALL APPROVALS REQUIRED BY THE CITY.
5. THE GENERAL CONTRACTOR SHALL MAINTAIN ONE SET OF THE APPROVED SUBMITTAL ON SITE FOR REFERENCE BY THE CITY INSPECTOR.
6. THE DEFERRED SUBMITTAL ITEMS SHALL NOT BE INSTALLED UNTIL SUBMITTAL DOCUMENTS HAVE BEEN APPROVED BY BUILDING OFFICIAL. ALL WORK COMPLETED PRIOR TO APPROVAL AND REQUIRES CHANGE OR MODIFICATION DUE TO APPROVALS IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
7. SEE STRUCTURAL NOTES FOR ADDITIONAL REQUIREMENTS FOR STRUCTURAL DEFERRED SUBMITTALS.
8. COORDINATE WITH GENERAL NOTES OF STRUCTURAL, MECHANICAL, AND ELECTRICAL FOR ADDITIONAL INSTRUCTIONS.

DEFERRED SUBMITTAL ITEMS

1. FIRE SPRINKLING DRAWINGS: FIRE SPRINKLER SYSTEM TO BE DESIGNED IN ACCORDANCE WITH NFPA 13 (ESFR), FOR RACK STORAGE OF CLASS ONE (1) THROUGH FOUR (4) COMMODITIES AND VARIOUS GROUP "A" PLASTICS. THESE DRAWINGS SHALL INCLUDE THE DESIGN CALCULATIONS, DESIGN DRAWINGS, APPROVAL FROM THE FIRE MARSHALL PRIOR TO SUBMITTING TO THE DESIGN TEAM FOR FINAL ACCEPTANCE. FIRE SPRINKLER CONTRACTOR/ DESIGN MUST VERIFY W/ LOCAL FIRE AUTHORITY ALL FIRE SPRINKLERS HEADS TO BE PLACED AS CLOSE AS POSSIBLE TO DECKS. NO REVIEW WILL BE PERFORMED IF THE SUBMITTAL IS NOT COMPLETE. THE CONTRACTOR WILL ALSO BE RESPONSIBLE FOR ANY THIRD PARTY REVIEW COSTS REQUIRED BY LOCAL JURISDICTIONS FIRE AUTHORITY.
2. FIRE ALARM DESIGN: THE FIRE ALARM DEVICES SHOWN ON THE DRAWINGS ARE DIAGRAMATIC, IT IS THE RESPONSIBILITY OF THE FIRE ALARM CONTRACTOR TO PROVIDE A SYSTEM THAT MEETS THE FULL INTENT OF NFPA 72. THE SUB CONTRACTOR WILL BE RESPONSIBLE TO TEST TO VERIFY THE REQUIREMENTS OF NFPA 72 ARE BEING MET. IF ADDITIONAL FIRE ALARM DEVICES ARE REQUIRED, THE DEVICES WILL BE THE REQUIREMENTS OF THE FIRE ALARM CONTRACTOR TO PROVIDE A COMPLETE SYSTEM TO MEET NFPA 72.

BUILDING CODES

ALL CONSTRUCTION IN ASSOCIATION WITH THIS PROJECT SHALL COMPLY WITH THE STATE ADOPTED CODES
LISTED BELOW:
- 2021 EDITION OF THE INTERNATIONAL BUILDING CODE (IBC), INCLUDING APPENDIX C AND J
- 2020 EDITION OF THE NATIONAL ELECTRICAL CODE (NEC)
- 2021 EDITION OF THE INTERNATIONAL PLUMBING CODE (IPC)
- 2021 EDITION OF THE INTERNATIONAL MECHANICAL CODE (IMC)
- 2021 EDITION OF THE INTERNATIONAL ENERGY CONSERVATION CODE (IECC)
- 2021 EDITION OF THE INTERNATIONAL FUEL GAS CODE (IFGC)
- 2021 INTERNATIONAL FIRE CODE (IFC)
- ICC/ANSI A117.1-2009
- UTAH STATE AMENDMENTS TO THE ABOVE MENTIONED CODES.

NOTE:

THE CONTRACTOR IS TO CONTACT THE UTAH DIVISION OF AIR QUALITY, (801) 536-4000. COMPLIANCE WITH THEIR REQUIREMENTS IS MANDATORY.

NOTE:

Fire suppression, detection and site utility drawings for fire protection, are deferred submittals and require a separate building permit. These drawings are not approved as part of this submitted package.(Deferred submittals require a signed agreement with Idaho Falls; registered design professional; and the building owner; and/or tenant).
Any Building Fire Sprinkler System Work (IFC [A] 105.7.1).
Any Building Fire Alarm System Work (IFC [A] 105.7.6).
All deferred (IBC 107.3.4.1) submittal item(s) need to be submitted within a timely manner (30 calendar days of the original building permit issuance date). The final inspection approval (IBC 110.3.10) cannot be issued and no building or structure can be used or occupied (IBC 111.1) until all the deferred submitted items are approved by the building official.

FIRE DEPARTMENT CONNECTION & EMERGENCY RESPONDER RADIO COVERAGE NOTES:

A. THE BUILDING SHALL BE CONSIDERED TO HAVE ACCEPTABLE EMERGENCY RESPONDER RADIO COVERAGE WHEN SIGNAL STRENGTH MEASUREMENTS IN 95 PERCENT OF ALL AREAS ON EACH FLOOR OF THE BUILDING MEET THE SIGNAL STRENGTH REQUIREMENTS OF SECTIONS 510.4.1.1 AND 510.4.1.2 OF THE INTERNATIONAL FIRE CODE.
B. A VALID FCC-ISSUED GENERAL RADIO OPERATOR'S LICENSE; AND CERTIFICATION OF IN-BUILDING SYSTEM TRAINING ISSUED BY A NATIONALLY RECOGNIZED ORGANIZATION,SCHOOL OR A CERTIFICATE ISSUED BY THE MANUFACTURER OF THE EQUIPMENT BEING INSTALLED. THE EMERGENCY RESPONDER RADIO COVERAGE SYSTEM INSTALLATION AND COMPONENTS SHALL ALSO COMPLY WITH ALL APPLICABLE FEDERAL REGULATIONS INCLUDING, BUT NOT LIMITED TO, FCC 47 CFR PART 90.219.
C. PROVIDE AN ADDRESS ON THE BUILDING WHICH IS ASSIGNED BY THECITY ENGINEERING DEPARTMENT. IF THE SPACE IS SUBDIVIDED THEN THE UNIT NUMBER OR LETTER SHALL BE PLACED ON OR NEAR THE ENTRANCE OF THE UNIT. THESE NUMBERS AND LETTERS SHALL BE VISIBLE FROM THE STREET AND BE A MINIMUM 6 INCHES HIGH AND A STROKE OF ½ INCH. ADDRESS NUMBERS SHALL BE ARABIC NUMBERS OR ALPHABETICAL LETTERS. THIS ADDRESS SHALL BE CONTRASTING COLOR OF THE BACKGROUND.
D. IN ACCORDANCE WITH IFC SECTION 510 BUILDINGS SHALL HAVE APPROVED RADIO COVERAGE FOR EMERGENCY RESPONDERS WITHIN THE BUILDING BASED UPON THE EXISTING COVERAGE LEVELS OF THE PUBLIC SAFETY COMMUNICATION SYSTEMS OF THE JURISDICTION AT THE EXTERIOR OF THE BUILDING. THIS SECTION SHALL NOT REQUIRE IMPROVEMENT OF THE EXISTING PUBLIC SAFETY COMMUNICATION SYSTEMS. THE BUILDING SHALL BE CONSIDERED TO HAVEACCEPTABLE EMERGENCY RESPONDER RADIO COVERAGE WHEN SIGNAL STRENGTH MEASUREMENTS IN 95 PERCENT OF ALL AREAS ON EACH FLOOR OF THE BUILDING MEET THE SIGNAL STRENGTH REQUIREMENTS OF SECTIONS 510.4.1.1 AND 510.4.1.2 OF THE INTERNATIONAL FIRE CODE.
E. EMERGENCY RESPONDER RADIO SYSTEM COVERAGE SHALL BE DESIGNEDIN ACCORDANCE WITH IFC SECTION 510. A SEPARATE FIRE PERMIT IS REQUIRED AS SPECIFIED ininFC SECTION 105.7.5 (SALT LAKE CITY RADIO SYSTEM DESIGN IS BOTH AN 800 MHZ ANALOG TRUNKING SYSTEM AND A MIXED ANALOG P25 DIGITAL SYSTEM ON 800 MHZ.). THE MINIMUM QUALIFICATIONS OF THE SYSTEM DESIGNER AND LEAD INSTALLATION PERSONNEL SHALL INCLUDE: A VALID FCC-ISSUED GENERAL RADIO OPERATOR'S LICENSE; AND CERTIFICATION OF IN-BUILDING SYSTEM TRAINING ISSUED BY A NATIONALLY RECOGNIZED ORGANIZATION, SCHOOL OR A CERTIFICATE ISSUED BY THE MANUFACTURER OF THE EQUIPMENT BEING INSTALLED. THE EMERGENCY RESPONDER RADIO COVERAGE SYSTEM INSTALLATION AND COMPONENTS SHALL ALSO COMPLY WITH ALL APPLICABLE FEDERAL REGULATIONS INCLUDING, BUT NOT LIMITED TO, FCC 47 CFR PART 90.219.

FIRE NOTES:

1. FIRE PUMP ROOMS FOR ALL WATER BASED FIRE SYSTEMS (SPRINKLER AND STANDPIPE) SHALL BE CONSTRUCED WITH THE FOLLOWING CLEARANCES:
   A. A MINIMUM OF 12 INCHES THAT IS UNOBSTRUCTED FROM ALL WALLS (INTERIOR AND EXTERIOR) TO INCLUDE MULTIPLE RISERS WHICH ARE SUPPLIED BY ONE OR MORE SUPPLY MAIN.
   B. A MINIMUM OF 36 INCHES SHALL BE PROVIDED IN FRONT OF THE APPLIANCES LISTED ABOVE.
   C. PUMP ROOMS SHALL BE PROVIDED WITH A CLEAR AND UNOBSTRUCTED PASSAGEWAY TO THE RISER ROOM OF NOT LESS THAN 72 INCHES AND THE OPENING INTO THE ROOM SHALL BE CLEAR AND UNOBSTRUCTED AND LARGE ENOUGH TO ALLOW FOR THE REMOVAL OF THE LARGEST PIECE OF EQUIPMENT, WITH DOORS SWINGING IN THE OUTWARD DIRECTION FROM THE ROOM AND THE OPENING PROVIDING A CLEAR WIDTH OF NOT LESS THAN 68 INCHES AND A CLEAR HEIGHT OF THE DOOR OPENING SHALL NOT BE LESS THAN 80 INCHES.
2. FIRE ALARM SYSTEM SHALL BE INSTALLED WHEN THERE ARE EXTINGUISHG SYSTEMS IN THE BUILDING FOR OCCUPANT NOTIFICATION.
3. AUDIBLE ALARM NOTIFICATION APPLIANCES SHALL PROVIDE A SOUND PRESSURE LEVEL OF 15 DECIBLES (dBA) ABOVE THE AVERAGE AMBIENT SOUND LEVEL OR 5 dBA ABOVE THE MAXIMUM SOUND LEVEL HAVING A DURATION OF AT LEAST 60 SECONDS, WHICHEVER IS GREATER, IN EVERY OCCUPIED SPACE WITHIN THE BUILDING.
4. THE MAXIMUM SOUND PRESSURE LEVEL FOR AUDIBLE ALARM NOTIFICATION APPLIANCES SHALL BE 110 dBA AT THE MINIMUM HEARING DISTANCE FROM THE AUDIBLE APPLIANCE. WHERE THE AVERAGE AMBIENT NOISE IS GREATERTHAN 95 dBA, VISIBLE ALARM NOTIFICATION APPLIANCES SHALL BE PROVIDEDIN ACCORDANCE WITH NFPA 72 AND AUDIBLE ALARM NOTIFICATION APPLIANCES SHALL NOT BE REQUIRED.
5. FIRE ALARM SYSTEM HORN AND STROBE SHALL BE INSTALLED UNLESS WITHIN THE AREA APPLIANCES ARE INSTALLED AND THE AREA HAS THE REQUIRED db RATING AS PRESCRIBED IN INTERNATIONAL FIRE CODE 907.5.2.1.1 & VISIBLE REQUIREMENTS IN SECTION 907.5.2.3.
6. POWER PANELS WHICH SUPPLY POWER TO FIRE ALARM SYSTEMS SHALL HAVE BRANCH CIRCUITS IDENTIFIED BY RED LABELS STATING "FIRE ALARM CIRCUIT" THIS REQUIREMENT MAY BE FOUND IN NATIONAL ELECTRICAL CODE ARTICLE 760.41B.
7. WATER LATERALS THAT SUPPLY WATER BASED FIRE PROTECTION SHALL BE FERROUS PIPE WHEN IT PASSES THROUGH A FOUNDATION WALL OR UNDER FOOTING AND FOUNDATION WALLS.

Project Name

Client Name

Architectural Floor Plans

Project Number	
Issue Date	
Author	
Checker	

A101

12" = 1'-0"

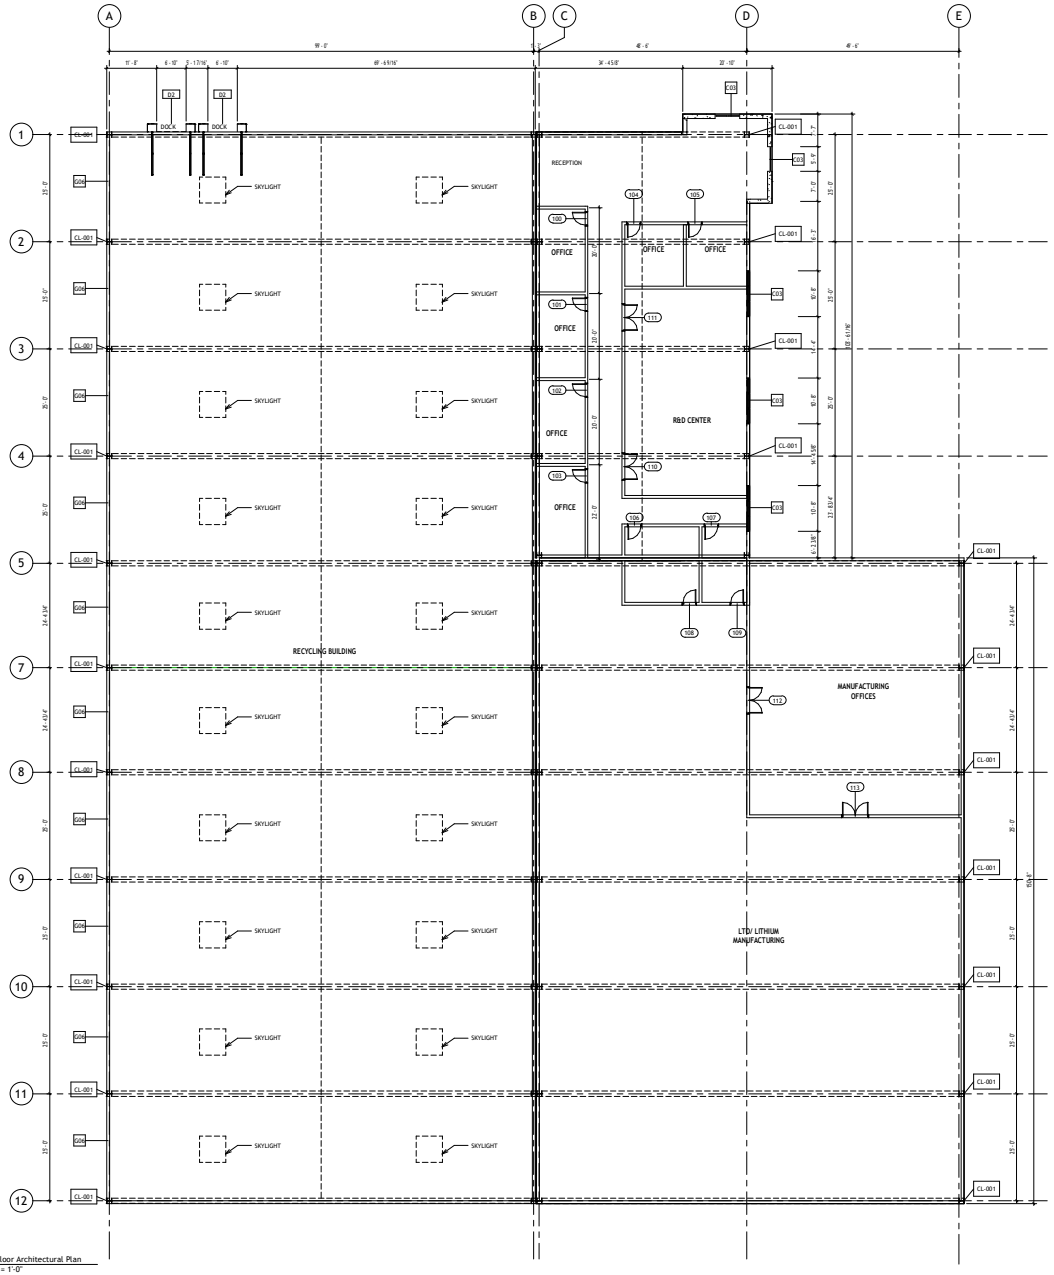

1 First Floor Architectural Plan
3/32" = 1'-0"

GENERAL NOTES

1. ALL DIMENSIONS ARE TO FACE-OF-STUD UNLESS NOTED OTHERWISE. ALL EXTERIOR COLUMNS ARE DIMENSIONED TO OUTSIDE FACE OF WALL. REFER TO DETAILS FOR CLARIFICATION.
2. SEE SHEET G002 FOR PROJECT GENERAL NOTES REVIEW ALL NOTES PRIOR TO CONSTRUCTION.
3. PRIOR TO CONSTRUCTION, CONTRACTOR TO VERIFY ALL COLORS AND MATERIALS.
4. INSTALL ALL MATERIALS PER MANUFACTURERS RECOMMENDATION.
5. ALL GYP. BOARD SURFACES TO BE TAPED, SANDED, AND PRIMED.
6. SEE STRUCTURAL DRAWINGS AND CALCULATIONS FOR ALL STRUCTURAL REQUIREMENTS.
7. COORDINATE WITH STRUCTURAL FRAMING PLANS FOR LOCATIONS OF COLUMNS, BEAMS, ETC.
8. COORDINATE ALL WINDOWS HEAD HEIGHTS AND SIZES WITH ELEVATIONS AND SCHEDULES.
9. COORDINATE WITH ELECTRICAL FOR ALL LIGHTING, POWER, & DATA REQUIRMENTS.
10. FIRE RATED ASSEMBLIES SHALL BE CONTINUOUS BOTH ORIZONTIALLY AND VERTICALLY AND SHALL EXTEND FROM RATED ASSEMBLY TO RATED ASSEMBLY. FIRE CAULK ALL PENETRATIONS.
11. FIRE EXTINGUISHERS, SMOKE DETECTORS, OTHER EMERGENCY DEVICES LOCATIONS, AND RATINGS SHALL BE APPROVED BY FIRE MARSHAL PRIOR TO INSTALLATION.
12. FRAMING CONTRACTOR SHALL PROVIDE AIDDTIONAL BLOCKING THROUGHOUT THE PROJECT AS REQUIRED TO ACCOMMODATE WALL-MOUNTED FURNISHINGS: ARTWORK, ETC.
13. DOORS SHALL BE LOCATED 6" OFF ADJACENT WALL UNLESS NOTED OTHERWISE.
14. CONTRACTOR IS TO PROVIDE SUBMITTALS AND SHOP DRAWINGS ON ALL KEYNOTED ITEMS FOR APPROVAL FROM WNER/ARCHITECT.
15. PRIOR TO ORDERING ANY EXTERIOR FINISHES, THE CONTRACTOR IS TO VERIFY ALL COLORS AND TYPES OF MATERIALS WITH OWNER/ARCHITECT.
16. ALL ASPECTS OF THIS PROJCET SHALL COMPLY WITH THE AMERICANS WITH DISABILITIES ACT AND THE ASSOCIATED DETAILS SEE G004 -G007. IF CONFLICTS OCCUR WHICH MAKE COMPLIANCE WITH THE ADA IMPOSSIBLE, NOTIFY THE ARCHITECT IMMEDIATELY BEFORE CONTINUING THE WORK.
17. ALL WALLS SHALL EXTEND TO THE UNDERSIDE OF DECK U.N.O.
18. SEE INTERIOR DRAWINGS FOR ALL FLOOR FINISHES.
19. PROVIDE MARKING & IDENTIFICATION ABOVE CEILING ON ALL RATED PARTITIONS ACCORDING TO 2021. IBC 703.5.
20. REFER TO REFLECTED CEILING PLANS FOR BULKHEAD DIMENSIONS AND WALL TYPES.
21. REFER TO OPENING TYPE SHEETS FOR FRAME ELEVATIONS REFERENCED IN THIS & OTHER VIEWS.
22. APPLY THE DOOR FRAME PAINT ONLY TO THE DOOR FRAM COVERING BOTH SIDES.
23. WHERE FLOOR MATERIAL CHANGES OCCURS BETWEEN TWO ROOMS, TRANSITION AT CENTER OF DOOR SO MATERIAL CHANGE IS NOT VISIBLE WHEN DOOR IS IN THE CLOSED POSITION.
24. PROVIDE SOLID BLOCKING IN WALLS TO SUPPORT SHELVES, CABINETS, TV'S,OWNERS EQUIPMENT, ETC. CONTRACTOR TO COORDINATE WITH OWNER FOR ANY OWNER SUPPLIED ITEMS THAT REQUIRES BLOCKING IN THE WALLS OR CEILINGS, OR ANY OTHER SPECIAL REQUIREMENTS.
27. DO NOT SCALE THE DRAWINGS.
28. CEILING HEIGHT MEASURED FROM CONCRETE-SEE-SECTIONS.
29. COORDINATE WITH OWNER ON ALL OWNER PROVIDED ITEMS.
30. COORDINATE WITH MECHANICAL DRAWINGS FOR ALL PLUMBING FIXTURES.

KEYNOTE LEGEND

03/015	CONCRETE TILT UP PANEL, SEE STRUCTURAL DRAWINGS
05/001	STRUCTURAL STEEL COLUMN - SEE STRUCTURAL
05/004	42" GALVANIZED GUARD RAILING PAINTED - PROVIDE SUBMITTAL FOR APPROVAL PRIOR TO FABRICATION
05/028	GALVANIZED METAL STAIR GRATE, MATCH HANDRAIL. PROVIDE SUBMITTAL FOR APPROVAL PRIOR TO FABRICATION
10/002	FIRE EXTINGUISHER, STANDARD. FIRE MARSHAL TO APPROVE ALL FINAL LOCATIONS
12/002	8" PIPE BOLLARD PAINTED - PROVIDE SUBMITTAL FOR APPROVAL
26/002	ELECTRICAL PANELS AND TRANSFORMER, SEE ELECTRICAL DRAWINGS
26/005	ELECTRICAL TRANSFORMER AND VAULT
32/030	DUMPSTER ENCLOSURE, SEE SHEET 8/A001

Project Name

Client Name

Architectural Floor Plans

Project Number	
Issue Date	
Author	
Checker	

A102

As indicated

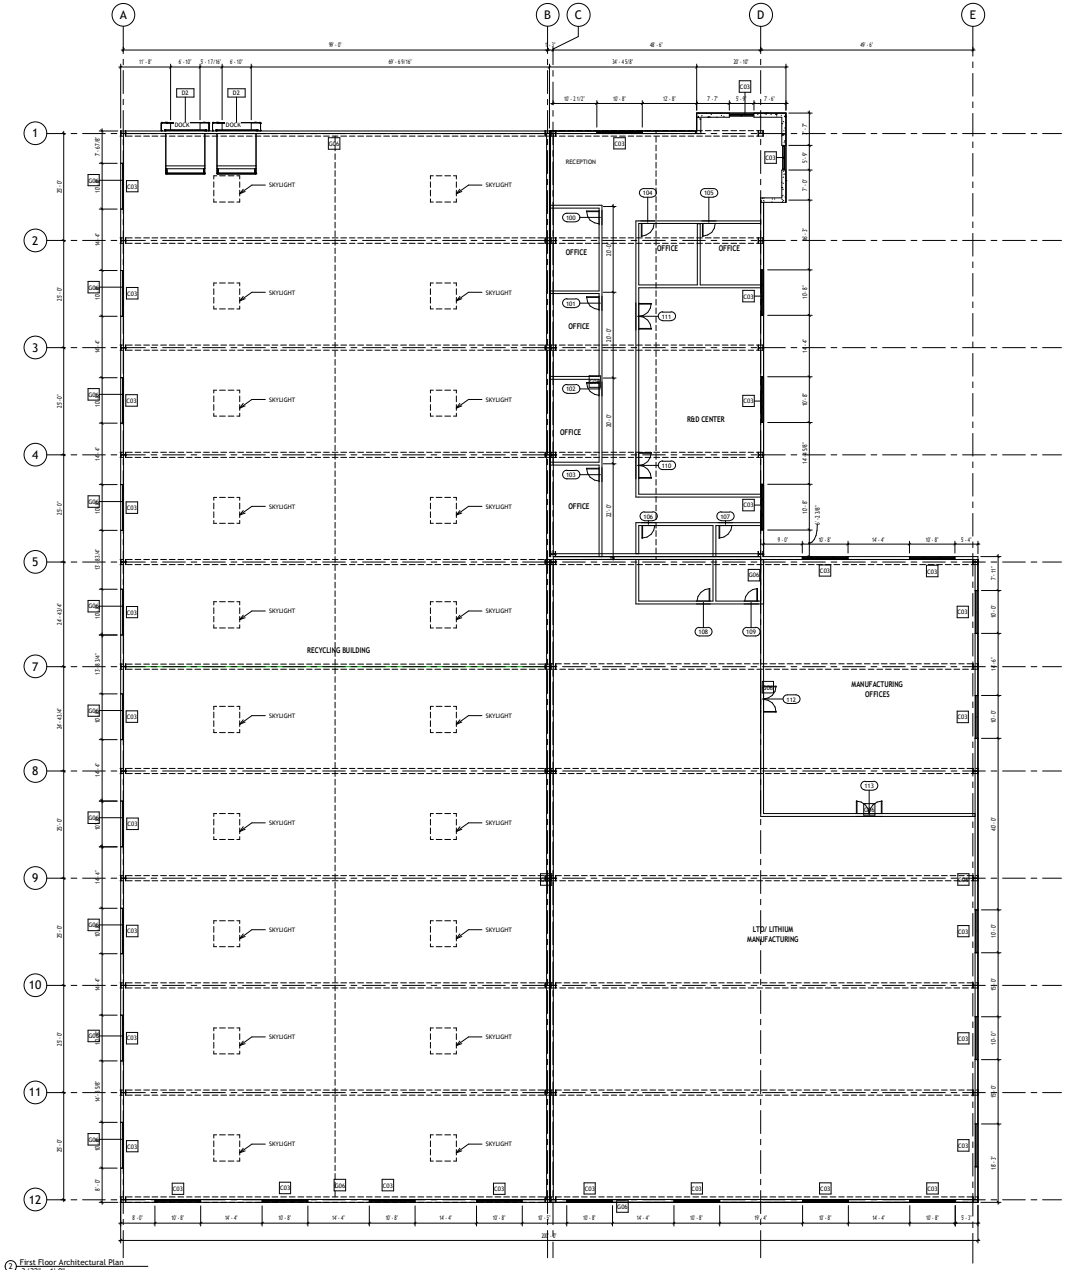

② First Floor Architectural Plan
3/32" = 1'-0"

GENERAL NOTES

1. ALL DIMENSIONS ARE TO FACE-OF-STUD UNLESS NOTED OTHERWISE. ALL EXTERIOR COLUMNS ARE DIMENSIONED TO OUTSIDE FACE OF WALL. REFER TO DETAILS FOR CLARIFICATION.
2. SEE SHEET G002 FOR PROJECT GENERAL NOTES REVIEW ALL NOTES PRIOR TO CONSTRUCTION.
3. PRIOR TO CONSTRUCTION, CONTRACTOR TO VERIFY ALL COLORS AND MATERIALS.
4. INSTALL ALL MATERIALS PER MANUFACTURERS RECOMMENDATION.
5. ALL GYP. BOARD SURFACES TO BE TAPED, SANDED, AND PRIMED.
6. SEE STRUCTURAL DRAWINGS AND CALCULATIONS FOR ALL STRUCTURAL REQUIREMENTS.
7. COORDINATE WITH STRUCTURAL FRAMING PLANS FOR LOCATIONS OF COLUMNS, BEAMS, ETC.
8. COORDINATE ALL WINDOWS HEAD HEIGHTS AND SIZES WITH ELEVATIONS AND SCHEDULES.
9. COORDINATE WITH ELECTRICAL FOR ALL LIGHTING, POWER, & DATA REQUIREMENTS.
10. FIRE RATED ASSEMBLIES SHALL BE CONTINUOUS BOTH HORIZONTALLY AND VERTICALLY AND SHALL EXTEND FROM RATED ASSEMBLY TO RATED ASSEMBLY. FIRE CAULK ALL PENETRATIONS.
11. FIRE EXTINGUISHERS, SMOKE DETECTORS, OTHER EMERGENCY DEVICES LOCATIONS, AND RATINGS SHALL BE APPROVED BY FIRE MARSHAL PRIOR TO INSTALLATION.
12. FRAMING CONTRACTOR SHALL PROVIDE AIDDTIONAL BLOCKING THROUGHOUT THE PROJECT AS REQUIRED TO ACCOMMODATE WALL-MOUNTED FURNISHINGS, ARTWORK, ETC.
13. DOORS SHALL BE LOCATED 6" OFF ADJACENT WALL UNLESS NOTED OTHERWISE.
14. CONTRACTOR IS TO PROVIDE SUBMITTALS AND SHOP DRAWINGS ON ALL KEYNOTED ITEMS FOR APPROVAL FROM WNER/ARCHITECT.
15. PRIOR TO ORDERING ANY EXTERIOR FINISHES, THE CONTRACTOR IS TO VERIFY ALL COLORS AND TYPES OF MATERIALS WITH OWNER/ARCHITECT.
16. ALL ASPECTS OF THIS PROJCET SHALL COMPLY WITH THE AMERICANS WITH DISABILITIES ACT AND THE ASSOCIATED DETAILS SEE G004 -G007. IF CONFLICTS OCCUR WHICH MAKE COMPLIANCE WITH THE ADA IMPOSSIBLE, NOTIFY THE ARCHITECT IMMEDIATELY BEFORE CONTINUING THE WORK.
17. ALL WALLS SHALL EXTEND TO THE UNDERSIDE OF DECK U.N.O.
18. SEE INTERIOR DRAWINGS FOR ALL FLOOR FINISHES.
19. PROVIDE MARKING & IDENTIFICATION ABOVE CEILING ON ALL RATED PARTITIONS ACCORDING TO 2021. IBC 703.5.
20. REFER TO REFLECTED CEILING PLANS FOR BULKHEAD DIMENSIONS AND WALL TYPES.
21. REFER TO OPENING TYPE SHEETS FOR FRAME ELEVATIONS REFERENCED IN THIS & OTHER VIEWS.
22. APPLY THE DOOR FRAME PAINT ONLY TO THE DOOR FRAM COVERING BOTH SIDES.
23. WHERE FLOOR MATERIAL CHANGES OCCURS BETWEEN TWO ROOMS, TRANSITION AT CENTER OF DOOR SO MATERIAL CHANGE IS NOT VISIBLE WHEN DOOR IS IN THE CLOSED POSITION.
24. PROVIDE SOLID BLOCKING IN WALLS TO SUPPORT SHELVES, CABINETS, TVS,OWNERS EQUIPMENT, ETC. CONTRACTOR TO COORDINATE WITH OWNER FOR ANY OWNER SUPPLIED ITEMS THAT REQUIRES BLOCKING IN THE WALLS OR CEILINGS, OR ANY OTHER SPECIAL REQUIREMENTS.
27. DO NOT SCALE THE DRAWINGS.
28. CEILING HEIGHT MEASURED FROM CONCRETE-SEE-SECTIONS.
29. COORDINATE WITH OWNER ON ALL OWNER PROVIDED ITEMS.
30. COORDINATE WITH MECHANICAL DRAWINGS FOR ALL PLUMBING FIXTURES.

Project Name

Client Name

UPPER WINDOW PLAN

Project Number	
Issue Date	
Author	
Checker	
A201	
As indicated	

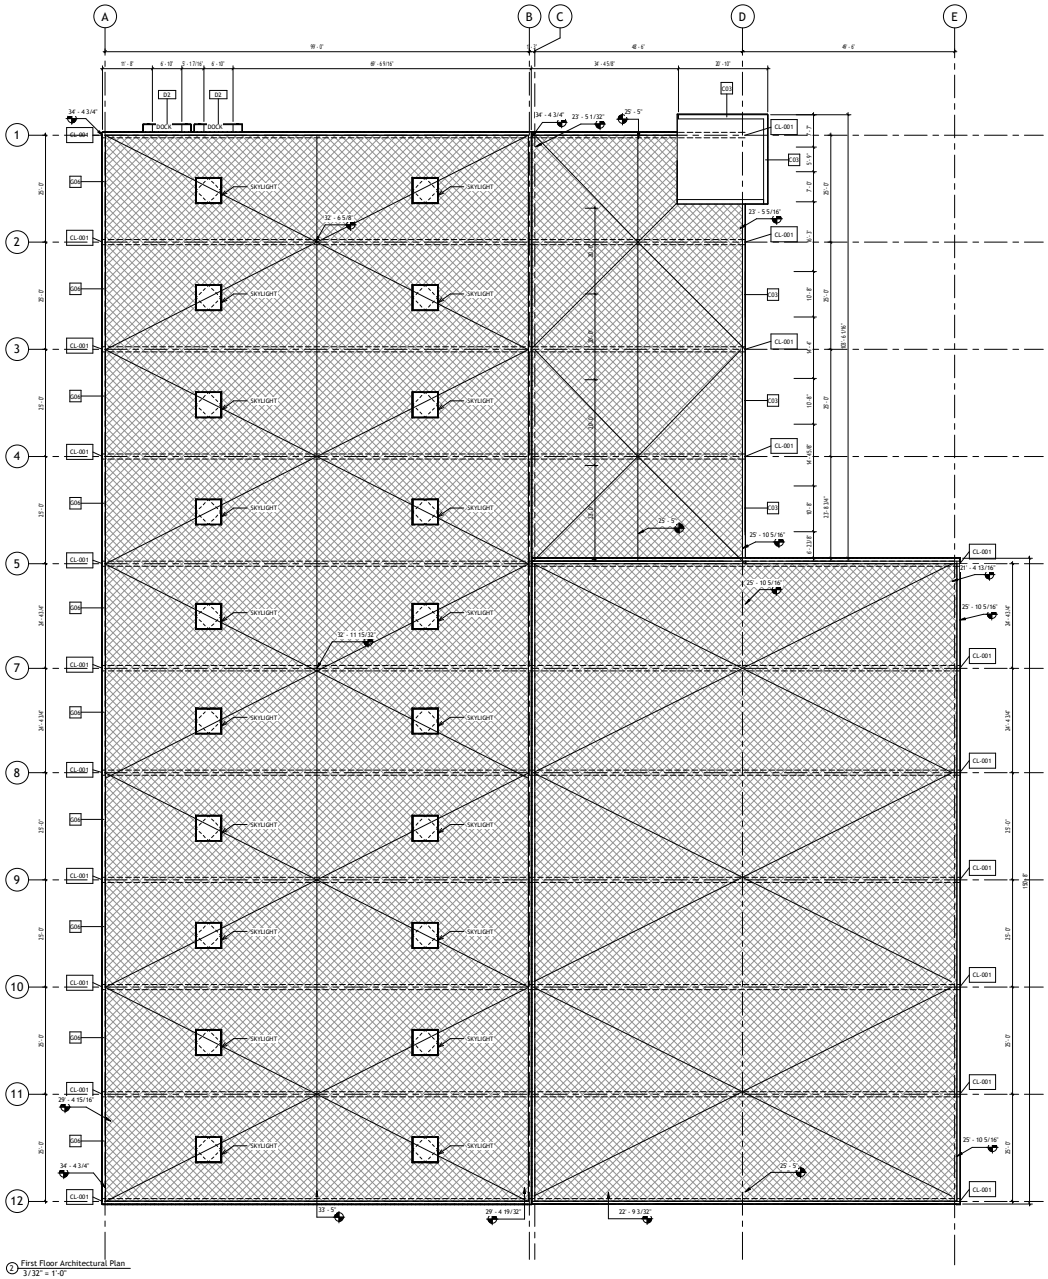

2 First Floor Architectural Plan
3/32" = 1'-0"

ROOFING NOTES (TYPICAL):

1. PROVIDE FULL MANUFACTURERS WARRANTY ON MATERIALS AND 5 YEAR WARRANTY MIN. ON LABOR. U.N.O.
2. ALL COLORS, ASSEMBLIES AND MATERIALS MUST MEET APPROVAL OF OWNER AND DESIGN PROFESSIONAL.
3. PROVIDE PRODUCT SUBMITTALS FOR PRE APPROVAL PRIOR TO ORDERING AND INSTALLATION
4. FOR TYPICAL ROOF/FLASHING DETAILS, SEE ROOFING DETAILS SHEET
5. PROVIDE STEP FLASHING COUNTER FLASHING, DRIP EDGES AS REQ'D. CAULK AND SEAL. ROOFING TO EXTEND 18" MIN. UP ADJACENT WALLS AND DISCONTINUITIES TYPICAL.
6. INSTALL ROOF PER MANUFACTURERS RECOMMENDATIONS AND SPECIFICATIONS. MANUFACTURER TO INSPECT INSTALLATION AS REQ'D FOR WARRANTEE. PROVIDE 1/4" PER FOOT MIN. SLOPE.
7. FOR ALL PLUMBING PENETRATIONS REFER TO DETAILS ON ROOFING DETAILS SHEET AND PLUMBING DRAWINGS.
8. TYPICAL MINIMUM ROOF SLOPE @ 1/4" MIN. PER FOOT ALL PLACES.
9. SEE MECHANICAL PLAN FOR ROOF MOUNTED EQUIPMENT AND CURBS, ETC.
10. CONSTRUCT ROOF FREE OF NON-DRAINING AREAS, WITH POSITIVE SLOPE TO DRAIN, UNDER ALL CONDITIONS. SUCH DEFECTS THAT CREATE AREAS NOT SUITED TO FREE DRAINAGE SHALL BE CAUSE FOR REJECTION OF THE INSTALLATION UNTIL CORRECTED.
11. PROVIDE CRICKETS WITH 1/4" PER FOOT MINIMUM SLOPE AT THE ASLOPE SIDE OF ALL EQUIPMENT CURB LOCATIONS & AT ALL PENETRATIONS GREATER THAN 30 INCHES WIDE AS MEASURED PERPENDICULAR TO THE SLOPE.
12. PROVIDE INSULATION WITH TOTAL BUILD UP THICKNESS AS REQUIRED TO ATTAIN LONG-TERM R-VALUE AS SPECIFIED IN ENERGY MODEL OR CROSSCHECK.
13. PROVIDE WALKWAY PROTECTION MAN AT ALL ROOF ACCESS AND LADDER LOCATIONS.
14. THE ROOF DECK TO SLOPE TO DRAIN LOCATION AS OUTLINED AT THE ROOF PLAN.
15. ROOFING SYSTEM TO MEET FM-1-90 RATING.
16. SEE ROOFING SPECIFICATION ON NEXT PAGE FOR ADDITIONAL INFORMATION.

Project Name

Client Name

ROOF PLAN

Project Number	
Issue Date	
Author	
Checker	

A202

As indicated

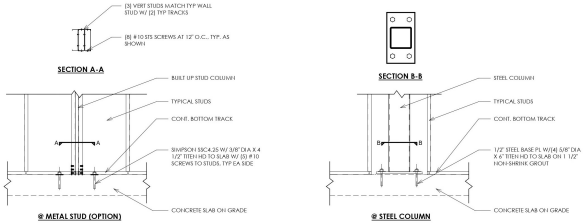

13 A113 **LADDER BASE DETAIL**
1" = 1'-0"



3 A113 **LADDER COLUMN AT ROOF DECK**
1" = 1'-0"

KEYNOTE LEGEND	
03/010	CONCRETE SLAB ON GRADE - SEE STRUCTURAL FOR THICKNESS AND REINFORCING
05/007	METAL JOISTS - PER STRUCTURAL FOR SIZE AND SPACING
05/013	PAINTED ROOF ACCESS LADDER - PROVIDE SUBMITTAL FOR APPROVAL PRIOR TO FABRICATION
05/030	METAL GIRDER - PER STRUCTURAL FOR SIZE AND SPACING
10/002	FIRE EXTINGUISHER. STANDARD. FIRE MARSHAL TO APPROVE ALL FINAL LOCATIONS
10/006	FIRE RISER - SEE PLUMBING
12/002	8" PIPE BOLLARD PAINTED - PROVIDE SUBMITTAL FOR APPROVAL

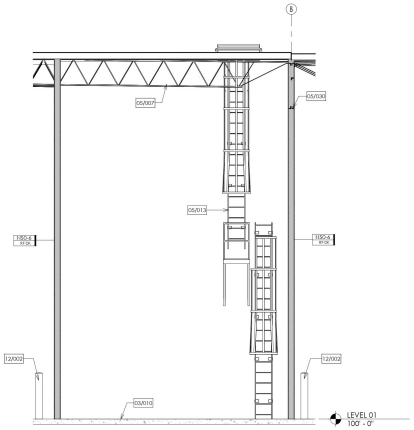

1 A113 **ROOF LADDER ELEVATIOIN**
1/4" = 1'-0"

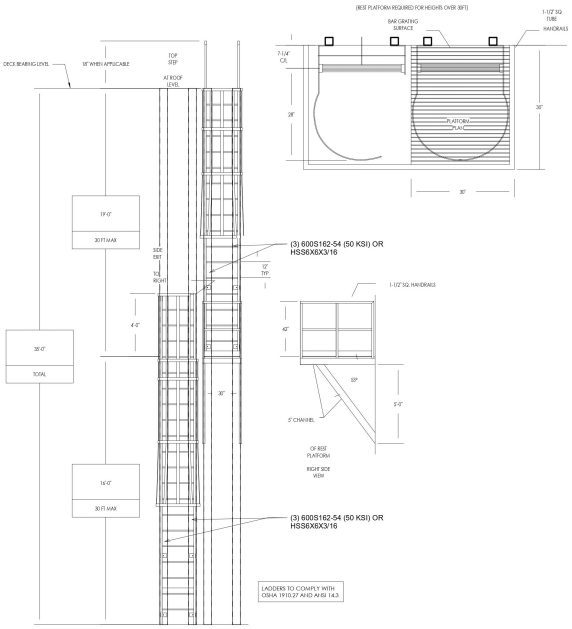

14 A113 **ROOF ACCESS LADDER W/ LANDING**
3/8" = 1'-0"

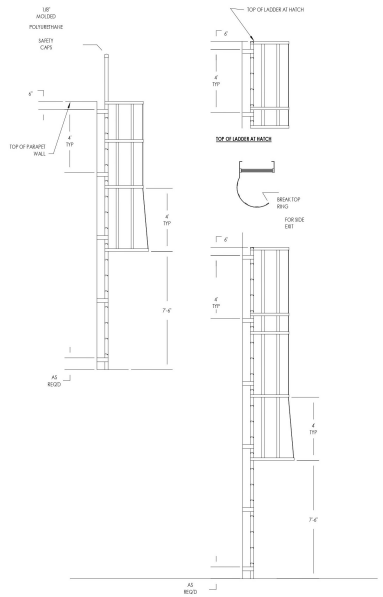

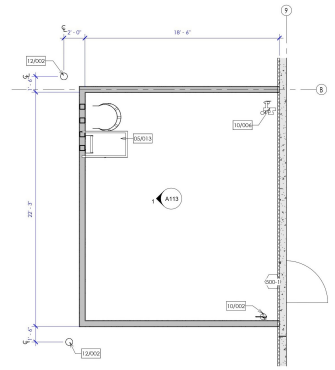

2 A113 **ENLARGE FIRE RISER ROOM**
1/4" = 1'-0"

Project Name

Client Name

ROOF DETAILS

Project Number	
Issue Date	
Author	
Checker	

A 203